Respiratory Protection Program
Table of Contents

I. General

II. Program Requirement and Identification

III. Responsibilities

IV. Medical Surveillance

V. Fit Testing

VI. Respirator Selection and Use

VII. Maintenance and Care

VIII. Voluntary Use of Respirators

IX. Training and Record Keeping

Appendices

A. Voluntary Use of Respirator Consent and Information Form

B. Respirator Training Fit Test and Issue Form

- Characteristics of the Hazardous Operation or Processes
- Nature of Contaminant (Chemical Properties)
- Concentration of Contaminant
- Respirator Enclosure Design
- Location of Hazardous Area
- Physical Conditions in Work Environment
- Vision and Communications

III. Responsibilities

In order for these guidelines to be effective, all University employees and students must clearly understand and take an active role in meeting these responsibilities and guidelines. Due to the potential hazards associated with various types of work activities, the specific responsibilities outlined below shall be followed.

A. Supervisors

Supervisors have the primary responsibility for implementation of the Respiratory Protection Program in their work area. They shall:

- Assist EHS in evaluating hazards in work areas.
- Identifying employees and students and their jobs or tasks which may require respiratory protection, providing this information to EHS, and seeking their assistance in evaluation of respiratory hazards.

C. Environmental Health & Safety

The EHS Department is responsible for the Respiratory Protection Program and shall:

- Oversee the RPP for campus.
- Review and update the written RPP.
- Evaluate respiratory hazards in the work areas.

Other tests may be required per federal regulations regarding the use, handling or work with specific materials. Refer to the UNC Medical Surveillance Program for further details.

Further medical evaluation may be prescribed if the physician believes the respirator user could have a greater potential for health impacts while utilizing respiratory protection in the work place.

Footnote

VI. Respirator Selection and Use

Once the hazards are identified and evaluated, the proper respiratory protective devices may be selected per the job site hazards and shall be approved for the particular contaminants for which are present.

A. Types of Respirators

There are many varieties of respiratory equipment that may be utilized to protect against inhalation hazards presented during operations requiring the use of

- All oxygen deficient atmospheres with levels at or below 19.5% and those enriched with oxygen above 23.5% or when in the presence of a flammable or combustible vapor is within LEL/UEL levels shall be deemed an IDLH atmosphere.
- Any respiratory device used only for the escape of an IDLH atmosphere shall be NIOSH certified.

2. Assigned Protection Factor

Federal regulations have assigned protection factors for different levels of respiratory protection. The following table indicates the various types of respirators available, and the maximum assigned protection factor assigned to each. The intended use and APF will allow for better selection methods.

Respirator Type	Protection Factor
Filtering Facepiece Respirators	5
Air-Purifying Half-Mask Respirators	10
Loose Fitting Powered Air-Purifying Respirator	25
Air-Purifying Full-Face Respirators	50

D. Operations

Before proceeding with any work requiring the use of respiratory protection, it is imperative to ensure equipment is properly working and damage free. This may include such items as, positive and negative pressure tests with an APR or demand response and positive pressure check with an SCBA.

VII. Maintenance and Care

The following information is intended as a guide for appropriate cleaning, storage, inspection and maintenance practices dealing with respiratory protection. Proper methods are conducted to ensure the longevity of service life and to ensure the devices will adequately protect employees during use.

A. Inspections

It is the responsibility to visually inspect their respiratory equipment before every use with each cleaning. They shall be inspected for:

- Function.
- Tightness of connections.
- Conditions of various parts including but not limited to; facepeice, head straps, valves, connecting tubes, cartridges, canisters or filters.
- If applicable, check the elastomeric portions for pliability.

B. Repairs

Any respiratory device failing inspection shall be taken out of service and repaired

recommendations. Consult the EHS Department for specifics.

C. Cleaning

Respiratory devices shall be cleaned regularly and disinfected.

- For re-useable respiratory devices, they shall be disassembled and washed in warm, mildly soupy water on a frequent schedule. Following the cleaning, the device shall be rinsed thoroughly and air dried and returned to a dust free enclosed storage.
- Alcohol or detergent pads may be used for a light cleaning.
- Dust masks/ Particulate respirators and single use respiratory devices shall be disposed of after becoming visibly soiled.
- Emergency use respiratory devices shall be cleaned after each use.

D. Storage

All respiratory devices and ancillary equipment, such as cartridges or filters shall be stored in dust tight containers. The storage must not cause physical distortion to elastomeric portions and avoid storing in direct sunlight or extremes of temperature. Emergency respiratory equipment on campus shall be stored in a nature that they are accessible during emergencies in clearly marked compartments.

VIII. Voluntary Use of Respirators

Under some circumstances, employees choose to use respiratory protection equipment on a voluntary basis as an extra precaution, or for protection against nuisance odors, even when there is no recognized hazard or overexposure. Respirator use in these circu
respiratory protection standard would not apply.

Voluntary use of respirators is only allowed if the respirator use will not interfere with an

or create health hazard such as skin irritation dermatitis, illness due to sharing contaminated , health effects caused by use of unsafe air supply.

EHS will maintain records of voluntary respirator use.

A. Requirements for voluntary use of filtering face pieces (e.g. N95, dust masks)
   - Completion of the UNC **Voluntary Use of Respirator Consent and Information Form (Appendix A)** and submitted to EHS.

IX. Training and Record Keeping

Training will be provided to all employees prior to the use of any such device during any work application when entering into the RPP and annually thereafter during fit testing procedures.

UNIVERSITY OF NORTHERN COLORADO

Environmental Health and Safety

dix A

Form for Voluntary Respirator Use: Appen

You should do the following:

he N95 respirator you have elected to use is approved for use against nuisance non-hazardous particulate/e.g.

Please complete the

and understood the information provided above.

I have read

Date

Appendix B

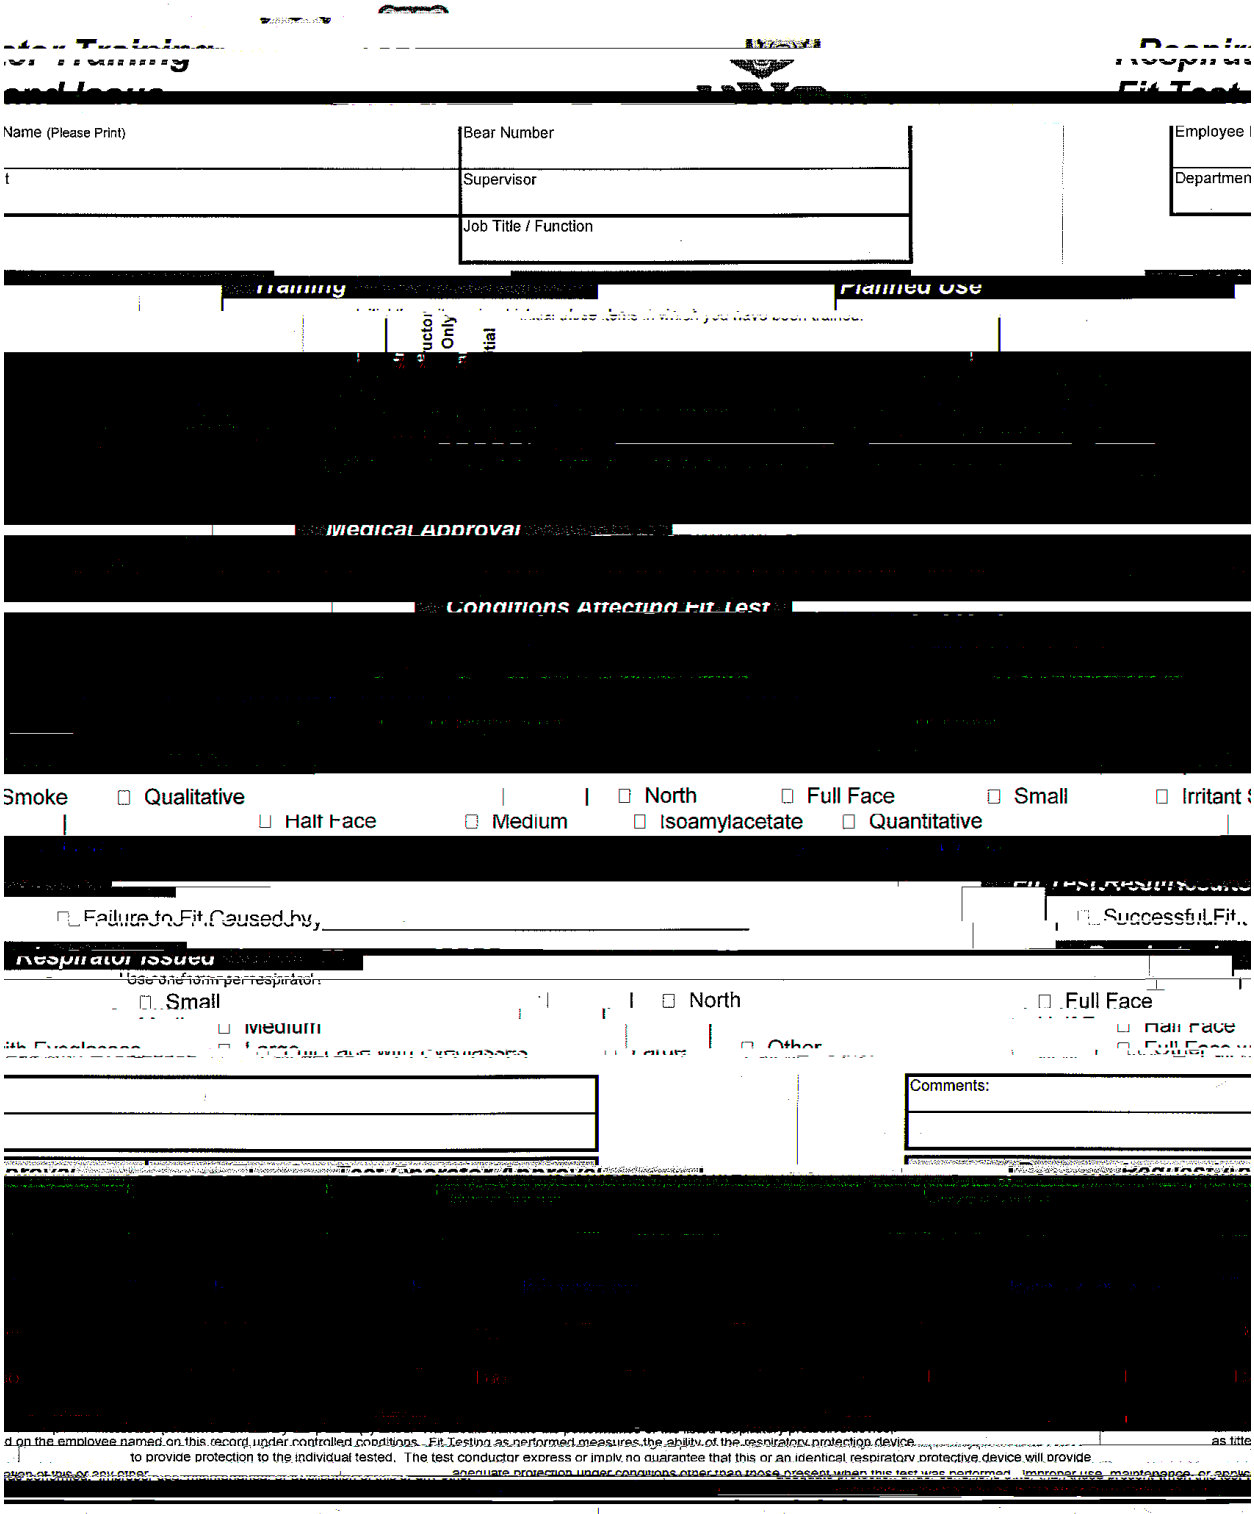

Name (Please Print)

Bear Number

Supervisor

Job Title / Function

Employee

Departmen

Training

Planned Use

Only

Medical Approval

Conditions Affecting Fit Test

Smoke ☐ Qualitative

☐ North ☐ Full Face ☐ Small ☐ Irritant

☐ Half Face ☐ Medium ☐ Isoamylacetate ☐ Quantitative

☐ Failure to Fit Caused by: _____

☐ Successful Fit

Respirator Issued

Use 3 hr/shift per respiration:

☐ Small ☐ North ☐ Full Face

☐ Medium ☐ Other

Comments:

d on the employee named on this record under controlled conditions. Fit Testing as performed measures the ability of the respiratory protection device as title

to provide protection to the individual tested. The test conductor express or imply no guarantee that this or an identical respiratory protective device will provide

ion of this or any other adequate protection under conditions other than those present when this test was performed. Improper use, maintenance, or adjus